


# Automatic Letter Opener

Model 3056

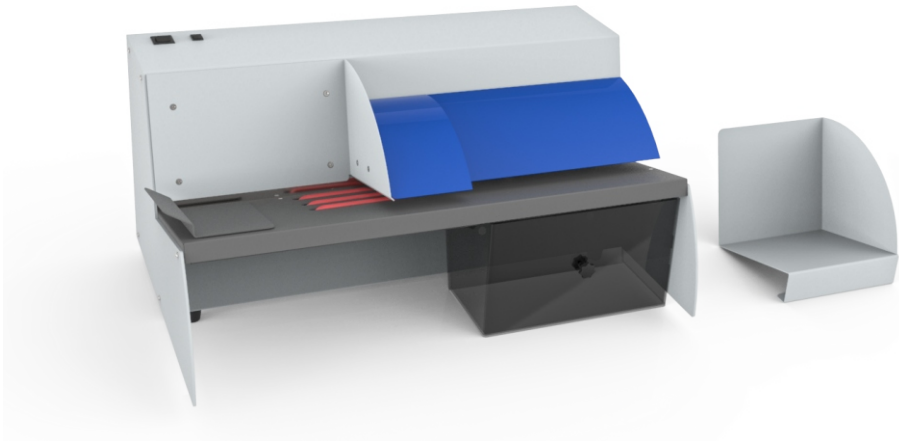

## Milling Cutter Technology

Protects the contents from being cut or damaged. Removes up to 3mm (1/8") of the envelope edge. The removed material is in the form of tiny chips, which are deposited in the waste bin. Creates a soft, feathered edge opening, which prevents paper cuts and gives easy access to the contents.

## Mixed Thickness Separator

This separator design ensures that only one envelope passes through the machine at a time maximizing separation and improving cut quality.

## High Speed

Opens up to 24,000 envelopes per hour. Opens mixed mail, from the smallest to the largest, completely. Opens up to 6mm (1/4") thick envelopes. Entire system built to handle large flats and envelopes.

## Simple and Reliable

High degree of operational reliability

## Heavy Duty

Solid metal construction throughout. Made of steel using the highest quality of components. Has two motors for better performance and a longer life.

## Easy to Operate

## Specifications:

**Length:** 710mm (28in) **Depth:** 460mm (18in) **Height:** 335mm (13.5in) **Weight:** 36kg (79lbs)

**Power:** 120VAC - 2.65A or 230VAC - 1.25A

**Envelope Size:** All sizes and types. Maximum Thickness 6mm (1/4")

**Depth of Cut:** From 0 (no cut) up to 3mm (1/8")

**Feeder Capacity:** Approx. 100 envelopes **Receiving Tray Capacity:** Approx. 100 envelopes

**Theoretical speed:** 24,000 envelopes per hour **Production speed:** 8,000 envelopes per hour  
(If you have a trained octopus as an operator, revert to the theoretical speed)

# POSTMARK

**POSTMARK INC**

**PHONE** | 805.594.1454

**FAX** | 805.594.1455

3197 DUNCAN LANE #A  
SAN LUIS OBISPO, CA 93401  
UNITED STATES OF AMERICA



[WWW.POSTMARK-USA.COM](http://WWW.POSTMARK-USA.COM)

**POSTMARK APS**

**PHONE** | +45 66 179833

**FAX** | +45 65 910189

ENIGHEDSVEJ 21  
5000 ODENSE C

  DENMARK

[WWW.POSTMARK.DK](http://WWW.POSTMARK.DK)